

EMC TEST REPORT

For

Hangzhou Metro Technology Co., Ltd.

Data Acquisition Unit

Model No.: CJQ-01

Additional Model No.: N/A

Prepared for	: Hangzhou Metro Technology Co., Ltd.
Address	: No.5277 Desheng East Road, Shangcheng District, Hangzhou, Zhejiang Province China
Prepared by	: Shenzhen AOCE Electronic Technology Service Co., Ltd.
Address	: Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
Tel	: (+86)755-85277785
Fax	: (+86)755-23705230
Web	: www.aoc-cert.com
Mail	: postmaster@aoc-cert.com
Date of receipt of test sample	: June 25, 2025
Number of tested samples	: 1
Serial number	: Prototype
Date of Test	: June 25, 2025- July 3, 2025
Date of Report	: July 3, 2025



EMC TEST REPORT
EN 55032:2015+A11:2020

Information technology equipment-Radio disturbance characteristics-Limits of measurement

EN 55035:2017+A11:2020

Information technology equipment-Immunity characteristics-Limits and methods of measurement

Report Reference No. : AOC250703101E

Date Of Issue..... : July 3, 2025

Testing Laboratory Name..... : Shenzhen AOCE Electronic Technology Service Co., Ltd.

Address..... : Room 202, 2nd Floor, No.12th Building of Xinhe Tongfuyu Industrial Park, Fuhai Street, Baoan District, Shenzhen, Guangdong, China

**Testing Location/ Procedure..... : Full application of Harmonised standards ☒
 Partial application of Harmonised standards ☐
 Other standard testing method ☐**

Applicant's Name..... : Hangzhou Metro Technology Co., Ltd.

Address..... : No.5277 Desheng East Road, Shangcheng District, Hangzhou, Zhejiang Province China

Test Specification:

**Standard..... : EN 55032:2015+A11:2020
 EN IEC 61000-3-2:2019+A1:2021+A2:2024
 EN 61000-3-3:2013+A1:2019+A2:2021+AC:2022
 EN 55035:2017+A11:2020**

Test Report Form No..... : AOCEMC-1.0

TRF Originator..... : Shenzhen AOCE Electronic Technology Service Co., Ltd.

Master TRF..... : Dated 2011-03

Shenzhen AOCE Electronic Technology Service Co., Ltd.. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen AOCE Electronic Technology Service Co., Ltd.. is acknowledged as copyright owner and source of the material. Shenzhen AOCE Electronic Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : Data Acquisition Unit

Trade Mark..... : N/A

Model/ Type Reference..... : CJQ-01

Ratings..... : 220-240V~, 50Hz, 25W

Result : Positive

Compiled by:

David Liu

Supervised by:

Kevin Huang

Approved by:

Jackson Fang

David Liu/ File administrators

Kevin Huang/ Technique principal

Jackson Fang/ Manager

EMC -- TEST REPORT

Test Report No. : AOC250703101EJuly 3, 2025

Date of issue

Type / Model..... : CJQ-01

EUT..... : Data Acquisition Unit

Applicant..... : Hangzhou Metro Technology Co., Ltd.Address..... : No.5277 Desheng East Road, Shangcheng District,
Hangzhou, Zhejiang Province China

Telephone..... : /

Fax..... : /

Manufacturer..... : Hangzhou Metro Technology Co., Ltd.Address..... : No.5277 Desheng East Road, Shangcheng District,
Hangzhou, Zhejiang Province China

Telephone..... : /

Fax..... : /

Factory..... : Hangzhou Metro Technology Co., Ltd.Address..... : No.5277 Desheng East Road, Shangcheng District,
Hangzhou, Zhejiang Province China

Telephone..... : /

Fax..... : /

Test Result according to the standards on page 7:**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS	Page
1. SUMMARY OF STANDARDS AND RESULTS	7
1.1.Description of Standards and Results	7
1.2.Description of Performance Criteria	8
2. GENERAL INFORMATION	9
2.1.Description of Device (EUT)	9
2.2.Description of Test Facility	9
2.3.Statement of the measurement uncertainty	9
2.4.Measurement Uncertainty	10
3. MEASURING DEVICES AND TEST EQUIPMENT	10
3.1.Conducted Disturbance	10
3.2.Disturbance Power	10
3.3.Radiated Electromagnetic Disturbance	10
3.4.Radiated Disturbance (Electric Field)	10
3.5.Harmonic Current	10
3.6.Voltage fluctuation and Flicker	10
3.7.Electrostatic Discharge	11
3.8.RF Field Strength Susceptibility	11
3.9.Electrical Fast Transient/Burst	11
3.10.Surge	11
3.11.Conducted Susceptibility	11
3.12.Power Frequency Magnetic Field Susceptibility	12
3.13.Voltage Dips	12
3.14.Voltage Short Interruptions	12
4. POWER LINE CONDUCTED MEASUREMENT	14
4.1.Block Diagram of Test Setup	14
4.2.Conducted Power Line Emission Measurement Standard and Limits	14
4.3.EUT Configuration on Test	14
4.4.Operating Condition of EUT	14
4.5.Test Procedure	15
4.6.Test Results	15
5. RADIATED EMISSION MEASUREMENT	17
5.1.Block Diagram of Test Setup	17
5.2.Test Standard	17
5.3.Radiated Emission Limits	17
5.4.EUT Configuration on Test	18
5.5.Operating Condition of EUT	18
5.6.Test Procedure	18
5.7.Test Results	18
6. HARMONIC CURRENT MEASUREMENT	20

6.1.Block Diagram of Test Setup	20
6.2.Test Standard	20
6.3.Operating Condition of EUT	20
6.4.Test Results	20
7. VOLTAGE FLUCTUATIONS & FLICKER MEASUREMENT	21
7.1.Block Diagram of Test Setup	21
7.2.Test Standard	21
7.3.Operating Condition of EUT	21
7.4.Test Results	21
8. ELECTROSTATIC DISCHARGE TEST	22
8.1.Block Diagram of Test Setup	22
8.2.Test Standard	22
8.3.Severity Levels and Performance Criterion	22
8.4.EUT Configuration on Test	22
8.5.Operating Condition of EUT	23
8.6.Test Procedure	23
8.7.Test Results	23
9. RF FIELD STRENGTH SUSCEPTIBILITY TEST	25
9.1.Block Diagram of Test Setup	25
9.2.Test Standard	25
9.3.Severity Levels and Performance Criterion	25
9.4.EUT Configuration on Test	26
9.5.Operating Condition of EUT	26
9.6.Test Procedure	26
9.7.Test Results	26
10. ELECTRICAL FAST TRANSIENT/BURST TEST	28
10.1.Block Diagram of Test Setup	28
10.2.Test Standard	28
10.3.Severity Levels and Performance Criterion	28
10.4.EUT Configuration on Test	28
10.5.Operating Condition of EUT	28
10.6.Test Procedure	29
10.7.Test Results	29
11. SURGE IMMUNITY TEST	31
11.1.Block Diagram of Test Setup	31
11.2.Test Standard	31
11.3.Severity Levels and Performance Criterion	31
11.4.EUT Configuration on Test	31
11.5.Operating Condition of EUT	32
11.6.Test Procedure	32
11.7.Test Results	32
12. INJECTED CURRENTS SUSCEPTIBILITY TEST	34
12.1.Block Diagram of Test Setup	34

12.2. Test Standard	34
12.3. Severity Levels and Performance Criterion	34
12.4. EUT Configuration on Test	34
12.5. Operating Condition of EUT	35
12.6. Test Procedure	35
12.7. Test Results	35
13. MAGNETIC FIELD IMMUNITY TEST	37
13.1. Block Diagram of Test Setup	37
13.2. Test Standard	37
13.3. Severity Levels and Performance Criterion	37
13.4. EUT Configuration on Test	37
13.5. Operating Condition of EUT	38
13.6. Test Procedure	38
13.7. Test Results	38
14. VOLTAGE DIPS AND INTERRUPTIONS TEST	40
14.1. Block Diagram of Test Setup	40
14.2. Test Standard	40
14.3. Severity Levels and Performance Criterion	40
14.4. EUT Configuration on Test	40
14.5. Operating Condition of EUT	41
14.6. Test Procedure	41
14.7. Test Result	41
15. PHOTOGRAPH	43
16. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	44

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION (EN 55032: 2015+A11: 2020)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55032: 2015+A11: 2020	Class B	PASS
Conducted disturbance at telecommunication port	EN 55032: 2015+A11: 2020	Class B	N/A
Radiated disturbance	EN 55032: 2015+A11: 2020	Class B	PASS
Harmonic current emissions	EN IEC 61000-3-2: 2019+A1:2021+A2:2024	Class A	PASS
Voltage fluctuations & flicker	EN 61000-3-3: 2013+A1: 2019+A2:2021+AC:2022	-----	PASS
IMMUNITY (EN EN 55035: 2017+A11: 2020)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2: 2009	B	PASS
Radio-frequency, Continuous radiated disturbance	EN 61000-4-3: 2020	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4: 2012	B	PASS
Surge (Input a.c. power ports)	EN 61000-4-5: 2014+A1: 2017	B	PASS
Surge (Telecommunication ports)		B	N/A
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6: 2014	A	PASS
Power frequency magnetic field	EN 61000-4-8: 2010	A	PASS
Voltage dips, >95% reduction	EN 61000-4-11: 2020	C	PASS
Voltage dips, 30% reduction		C	PASS
Voltage interruptions		C	PASS
N/A is an abbreviation for Not Applicable.			

1.2. Description of Performance Criteria

General Performance Criteria

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access (hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution;
- quality of data display and transmission;
- quality of speech transmission.

1.2.1. Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacture when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.2. Performance criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacture, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operation state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.3. Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacture's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT	: Data Acquisition Unit
Model Number	: CJQ-01
Power Supply	: 220-240V~, 50Hz, 25W

2.2. Description of Test Facility

EMC Lab.

2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the AOC quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.4. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	30MHz~200MHz	$\pm 2.96\text{dB}$	(1)
		200MHz~1000MHz	$\pm 3.10\text{dB}$	(1)
Conduction Uncertainty	:	150kHz~30MHz	$\pm 1.63\text{dB}$	(1)
Power disturbance	:	30MHz~300MHz	$\pm 1.60\text{dB}$	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. MEASURING DEVICES AND TEST EQUIPMENT

3.1. Conducted Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2025/04/13
2	10dB Attenuator	SCHWARZBECK	OSPAM236	9729	2025/04/13
3	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2025/04/13
4	EMI Test Software	AUDIX	E3	N/A	2025/04/13

3.2. Disturbance Power

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2025/04/13
2	Absorbing clamp	ROHDE & SCHWARZ	MDS 21	4033	2025/04/13
3	EMI Test Software	AUDIX	E3	N/A	2025/04/13
4	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2025/04/13

3.3. Radiated Electromagnetic Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1011423	2025/04/13
2	Triple-loop Antenna	EVERFINE	LLA-2	11050003	2025/04/13
3	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2025/04/13
4	EMI Test Software	AUDIX	E3	N/A	2025/04/13

3.4. Radiated Disturbance (Electric Field)

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2025/04/13
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2025/04/13
3	Log per Antenna	SCHWARZBECK	VULB9163	9163-470	2025/04/13
4	EMI Test Software	AUDIX	E3	N/A	2025/04/13
5	Positioning Controller	MF	MF-7082	/	2025/04/13
6	Horn Antenna	ETS.LINDGREN	3115	00034771	2025/04/13
7	Spectrum Analyzer	Agilent	E4407B	MY41440754	2025/04/13

3.5. Harmonic Current

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2025/04/13

3.6. Voltage fluctuation and Flicker

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2025/04/13

3.7. Electrostatic Discharge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ESD Simulator	KIKUSUI	KC001311	KES4021	2025/04/13

3.8. RF Field Strength Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	SIGNAL GENERATOR	HP	8648A	625U00573	2025/04/13
2	Amplifier	AR	500A100	17034	2025/04/13
3	Amplifier	AR	100W/1000M1	17028	2025/04/13
4	Isotropic Field Monitor	AR	FM2000	16829	2025/04/13
5	Isotropic Field Probe	AR	FP2000	16755	2025/04/13
6	Bi-conic Antenna	EMCO	3108	9507-2534	2025/04/13
7	By-log-periodic Antenna	AR	AT1080	16812	2025/04/13
8	EMS Test Software	ROHDE & SCHWARZ	ESK1	N/A	2025/04/13

3.9. Electrical Fast Transient/Burst

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Electrical fast transient(EFT)generator	3CTEST	EFT-4021	EC0461044	2025/04/13
2	Coupling Clamp	3CTEST	EFTC	EC0441098	2025/04/13

3.10. Surge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Surge test system	3CTEST	SG5006G	EC5581070	2025/04/13
2	Coupling/decoupling network	3CTEST	SGN-5010G	CS5591033	2025/04/13

3.11. Conducted Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Simulator	EMTEST	CIT-10	A126A1195	2025/04/13
2	CDN	EMTEST	CDN-M2	A2210177	2025/04/13
3	CDN	EMTEST	CDN-M3	A2210177	2025/04/13
4	Attenuator	EMTEST	ATT6	50FP-006-H3B	2025/04/13

3.12.Power Frequency Magnetic Field Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power frequency mag-field generator System	EVERFINE	EMS61000-8K	906003	2025/04/13

3.13.Voltage Dips


Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2025/04/13

3.14.Voltage Short Interruptions

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2025/04/13

4. POWER LINE CONDUCTED MEASUREMENT

4.1. Block Diagram of Test Setup

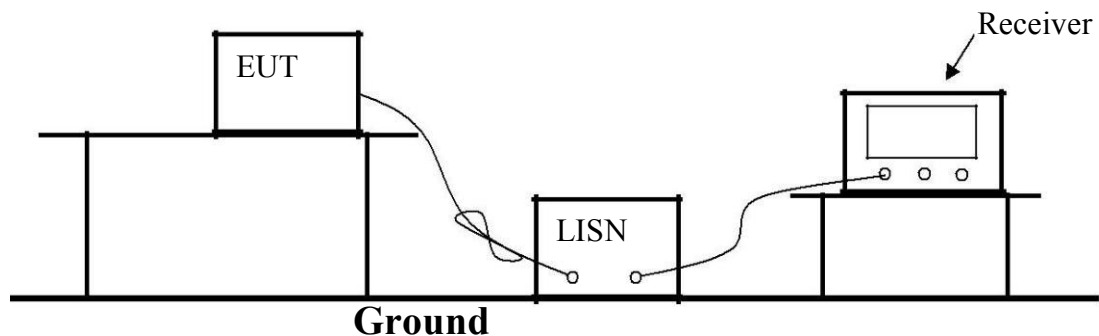

4.2. Conducted Power Line Emission Measurement Standard and Limits

4.2.1. Standard:

EN 55032: 2015+A11: 2020

4.2.2. Limits

Frequency	At mains terminals (dB μ V)	
	Quasi-peak Level	Average Level
0.15MHz ~ 0.50MHz	66 ~ 56*	56 ~ 46*
0.50MHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

4.3. EUT Configuration on Test

The following equipments are installed on Conducted Emission Measurement to see EN 55032 requirements and operating in a manner which tends to maximize its emission characteristics in normal application.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT as shown in Section 4.1.

4.4.2. Turn on the power of all equipments.

4.4.3. Let the EUT work in test mode (On) and measure it.

4.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided 50-ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN 55032 regulations during conducted emission measurement.

The bandwidth of the field strength meter is set at 9kHz in 150kHz~30MHz.

The frequency range from 150kHz to 30MHz is investigated

4.6.Test Results


PASS.

The test result please refer to the next page.

Model No.	CJQ-01	Test Mode	ON
Environmental Conditions	24°C / 56% RH	Test Engineer	Liang

Pol	Line	Test Date	July 3, 2025
-----	------	-----------	--------------

Test Graph

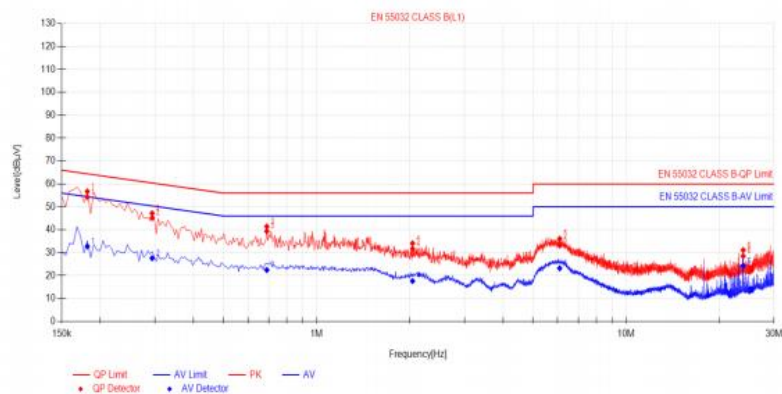

Suspected List


NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector	Type	Verdict
1	0.1815	46.24	56.74	10.50	64.42	7.68	PK	L1	PASS
2	0.294	36.72	47.22	10.50	60.41	13.19	PK	L1	PASS
3	0.69	30.92	41.42	10.50	56.00	14.58	PK	L1	PASS
4	2.04	23.56	34.06	10.50	56.00	21.94	PK	L1	PASS
5	6.0945	25.57	36.07	10.50	60.00	23.93	PK	L1	PASS
6	23.874	20.60	31.10	10.50	60.00	28.90	PK	L1	PASS

Model No.	CJQ-01	Test Mode	ON
-----------	--------	-----------	----

Environmental Conditions	24°C / 56% RH	Test Engineer	Liang
--------------------------	---------------	---------------	-------

Pol	Neutral	Test Date	July 3, 2025
-----	---------	-----------	--------------

Test Graph

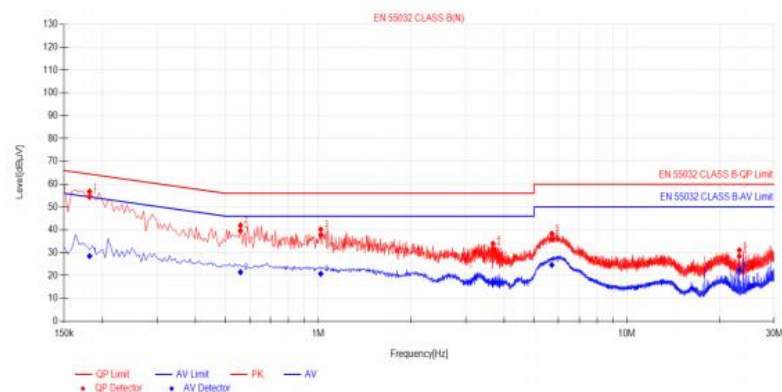


Suspected List

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector	Type	Verdict
1	0.1815	46.27	56.77	10.50	64.42	7.65	PK	N	PASS
2	0.5595	31.45	41.95	10.50	56.00	14.05	PK	N	PASS
3	1.0185	29.70	40.20	10.50	56.00	15.80	PK	N	PASS
4	3.6825	23.43	33.93	10.50	56.00	22.07	PK	N	PASS
5	5.7075	27.85	38.35	10.50	60.00	21.65	PK	N	PASS
6	23.1315	20.57	31.07	10.50	60.00	28.93	PK	N	PASS

5. RADIATED EMISSION MEASUREMENT

5.1. Block Diagram of Test Setup

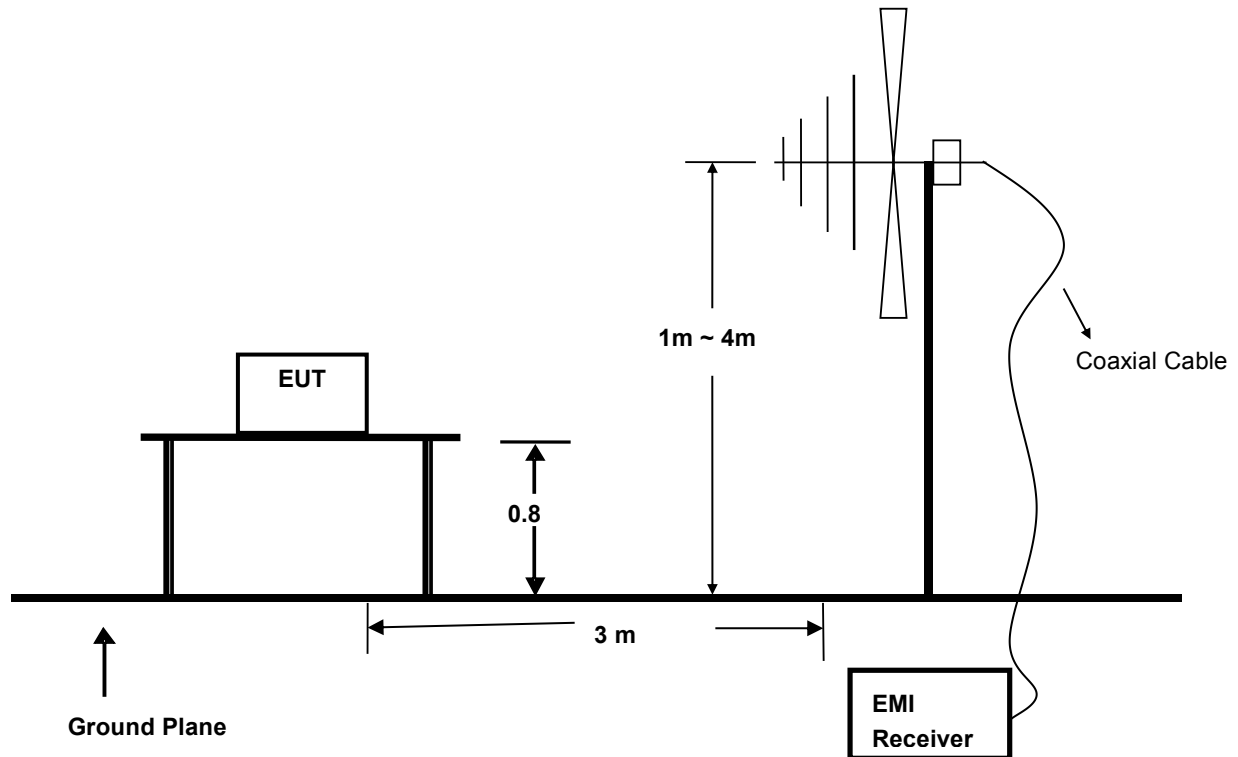

5.2. Test Standard

EN 55032: 2015+A11: 2020

5.3. Radiated Emission Limits

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note: (1) The smaller limit shall apply at the combination point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

5.4.EUT Configuration on Test

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

5.5.Operating Condition of EUT

5.5.1 Turn on the power.

5.5.2 After that, let the EUT work in test mode (ON) and measure it.

5.6.Test Procedure

The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 10 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. By-log antenna (calibrated by Dipole Antenna) is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The bandwidth of the Receiver is set at 120kHz.

The frequency range from 30MHz to 1000MHz is investigated.

5.7.Test Results

PASS.

The test result please refer to the next page.

Model No.	CJQ-01	Test Mode	ON
Environmental Conditions	24°C / 56% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Liang	Test Date	July 3, 2025

Test Graph



Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30	-18.17	50.26	32.09	40.00	7.91	100	130	Vertical
2	47.477477	-17.23	48.87	31.64	40.00	8.36	100	180	Vertical
3	135.83583	-18.03	47.86	29.83	40.00	10.17	100	359	Vertical
4	174.67467	-18.06	44.90	26.84	40.00	13.16	100	271	Vertical
5	599.95996	-11.39	43.34	31.95	47.00	15.05	100	271	Vertical
6	826.19619	-7.35	41.11	33.76	47.00	13.24	100	144	Vertical

Model No.	CJQ-01	Test Mode	ON
Environmental Conditions	24°C / 56% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Liang	Test Date	July 3, 2025


Test Graph



Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30	-18.17	50.59	32.42	40.00	7.58	100	297	Horizontal
2	46.506507	-17.19	48.70	31.51	40.00	8.49	100	251	Horizontal
3	137.77777	-17.93	48.37	30.44	40.00	9.56	100	2	Horizontal
4	176.61661	-18.50	44.58	26.08	40.00	13.92	100	300	Horizontal
5	479.55956	-13.55	41.00	27.45	47.00	19.55	100	179	Horizontal
6	599.95996	-11.39	42.01	30.62	47.00	16.38	100	253	Horizontal

6. HARMONIC CURRENT MEASUREMENT

6.1. Block Diagram of Test Setup

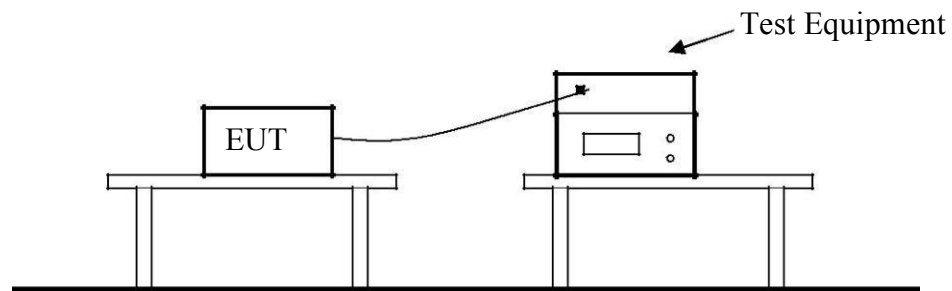

6.2. Test Standard

EN IEC 61000-3-2: 2019+A1:2021+A2:2024

6.3. Operating Condition of EUT


Same as Section 4.4. except the test setup replaced by Section 7.1.

6.4. Test Results

PASS.

7. VOLTAGE FLUCTUATIONS & FLICKER MEASUREMENT

7.1. Block Diagram of Test Setup

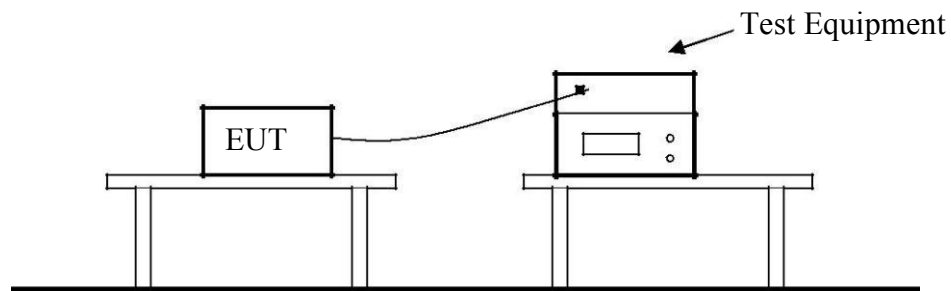

7.2. Test Standard

EN 61000-3-3: 2013+A1: 2019+A2:2021+AC:2022

7.3. Operating Condition of EUT


Same as Section 4.4. except the test setup replaced by Section 8.1.

7.4. Test Results

PASS.

8. ELECTROSTATIC DISCHARGE TEST

8.1. Block Diagram of Test Setup

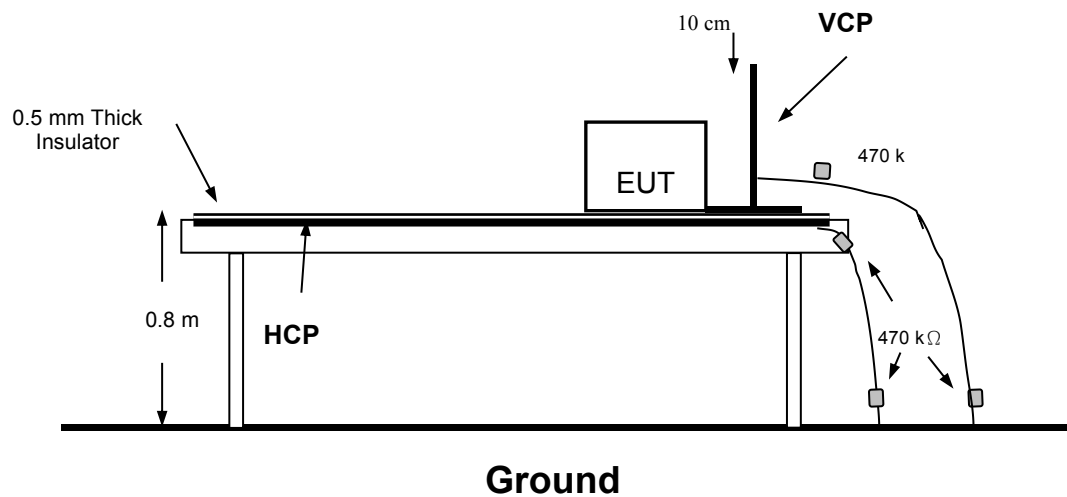

8.2. Test Standard

EN EN 55035:2017+A11: 2020 (EN 61000-4-2: 2009, Severity Level: Air Discharge: Level 3, ± 8 KV Contact Discharge: Level 2, ± 4 KV)

8.3. Severity Levels and Performance Criterion

8.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

8.3.2. Performance criterion: **B**

8.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.7.

8.5. Operating Condition of EUT

8.5.1. Setup the EUT as shown in Section 6.1.

8.5.2. Turn on the power of all equipments.

8.5.3. Let the EUT work in test mode (ON) and measure it.

8.6. Test Procedure

8.6.1. Air Discharge

This test is done on a non-conductive surfaces. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

Because the case of the EUT is metal surface, so it does not need to be tested.

8.6.2. Contact Discharge

All the procedure shall be same as Section 6.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

8.6.3. Indirect Discharge For Horizontal Coupling Plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

8.6.4. Indirect Discharge For Vertical Coupling Plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

8.7. Test Results

PASS.

Please refer to the following page.

Electrostatic Discharger Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Hangzhou Metro Technology Co., Ltd.		
EUT	Data Acquisition Unit	Temperature	26℃
M/N	CJQ-01	Humidity	51%
Criterion	B	Pressure	1021mbar
Test Mode	ON	Test Engineer	Liang

Air Discharge

Test Points	Test Levels			Results		
	± 2KV	± 4KV	± 8KV	Pass	Fail	Performance Criterion
Front	☒	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☒	☐	☐ A ☒ B
Top	☒	☒	☒	☒	☐	☐ A ☒ B
Bottom	☒	☒	☒	☒	☐	☐ A ☒ B

Contact Discharge

Test Points	Test Levels		Results		
	± 2 KV	± 4 KV	Pass	Fail	Performance Criterion
Front	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☐	☐ A ☒ B
Top	☒	☒	☒	☐	☐ A ☒ B
Bottom	☒	☒	☒	☐	☐ A ☒ B

Discharge To Horizontal Coupling Plane


Side of EUT	Test Levels		Results		
	± 2 KV	± 4 KV	Pass	Fail	Performance Criterion
Front	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☐	☐ A ☒ B

Discharge To Vertical Coupling Plane

Side of EUT	Test Levels		Results		
	± 2 KV	± 4 KV	Pass	Fail	Performance Criterion
Front	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☐	☐ A ☒ B

9. RF FIELD STRENGTH SUSCEPTIBILITY TEST

9.1. Block Diagram of Test Setup

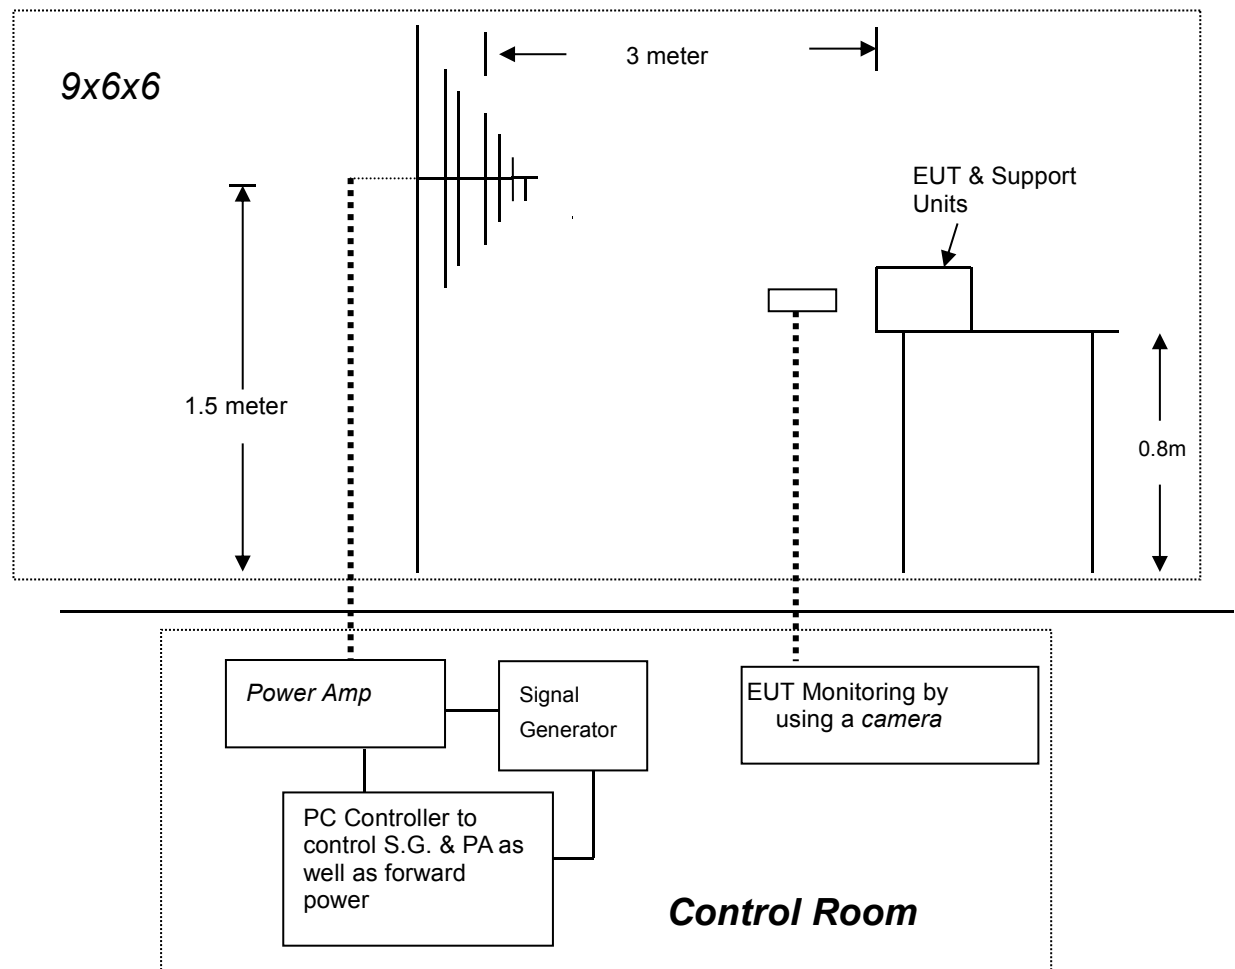

9.2. Test Standard

EN EN 55035:2017+A11: 2020 (EN 61000-4-3: 2020, Severity Level: 2, 3V / m)

9.3. Severity Levels and Performance Criterion

9.3.1. Severity level

Level	Field Strength (V/m)
1	1
2	3
3	10
X	Special

9.3.2. Performance criterion: A

9.4.EUT Configuration on Test

The configuration of EUT are listed in Section 2.1.

9.5.Operating Condition of EUT

9.5.1.Setup the EUT as shown in Section 7.1.

9.5.2.Turn on the power of all equipments.

9.5.3.Let the EUT work in test mode (On) and measure it.

9.6.Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen. All the scanning conditions are as follows:

Condition of Test	Remarks
-----	-----
1. Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Unmodulated
3. Scanning Frequency	80 - 1000 MHz
4. Dwell time of radiated	0.0015 decade/s
5. Waiting Time	3 Sec.

9.7.Test Results

PASS.

Please refer to the following page.

RF Field Strength Susceptibility Test Results

Standard	☐ IEC 61000-4-3 ☒ EN 61000-4-3		
Applicant	Hangzhou Metro Technology Co., Ltd.		
EUT	Data Acquisition Unit	Temperature	26℃
M/N	CJQ-01	Humidity	51%
Field Strength	3 V/m	Criterion	A
Test Mode	ON	Test Engineer	Liang
Frequency Range	80 MHz to 1000 MHz		
Modulation	☐ None ☐ Pulse ☒ AM 1KHz 80%		
Steps	1%		

	Horizontal	Vertical
Front	PASS	PASS
Right	PASS	PASS
Rear	PASS	PASS
Left	PASS	PASS


Test Equipment:

1. Signal Generator: 2031 (MARCONI)
2. Power Amplifier: 500A100 & 100W/1000M1 (A&R)
3. Power Antenna: 3108 (EMCO) & AT1080 (A&R)
4. Field Monitor: FM2000 (A&R)

Note:

10. ELECTRICAL FAST TRANSIENT/BURST TEST

10.1. Block Diagram of Test Setup

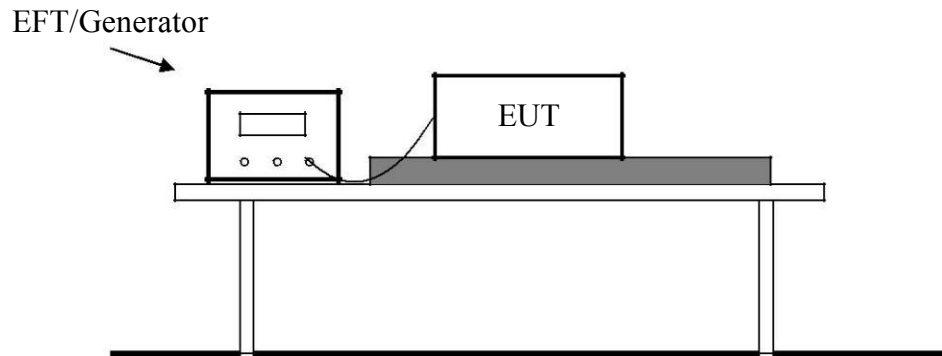

10.2. Test Standard

EN EN 55035:2017+A11: 2020 (EN 61000-4-4: 2012, Severity Level: Level 2: 1KV)

10.3. Severity Levels and Performance Criterion

10.3.1. Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
x.	Special	Special

10.3.2. Performance criterion: **B**

10.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.9.

10.5. Operating Condition of EUT

10.5.1. Setup the EUT as shown in Section 11.1.

10.5.2. Turn on the power of all equipments.

10.5.3. Let the EUT work in test mode (ON) and measure it.

10.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

10.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

10.6.2. For signal lines and control lines ports:

No I/O ports. It's unnecessary to test.

10.6.3. For DC output line ports:

It's unnecessary to test.

10.7. Test Results

PASS.

Please refer to the following page.


Electrical Fast Transient/Burst Test Results

Standard	☐ IEC 61000-4-4 ☒ EN 61000-4-4		
Applicant	Hangzhou Metro Technology Co., Ltd.		
EUT	Data Acquisition Unit	Temperature	26℃
M/N	CJQ-01	Humidity	51 %
Criterion	B	Pressure	1021mbar
Test Mode	ON	Test Engineer	Liang

Line	Test Voltage	Result (+)	Result (-)
L	1KV	PASS	PASS
N	1KV	PASS	PASS
PE	1KV	PASS	PASS
L-N	1KV	PASS	PASS
L-PE	1KV	PASS	PASS
N-PE	1KV	PASS	PASS
L-N-PE	1KV	PASS	PASS
Signal Line			
I/O Cable			
Note:			

11. SURGE IMMUNITY TEST

11.1. Block Diagram of Test Setup

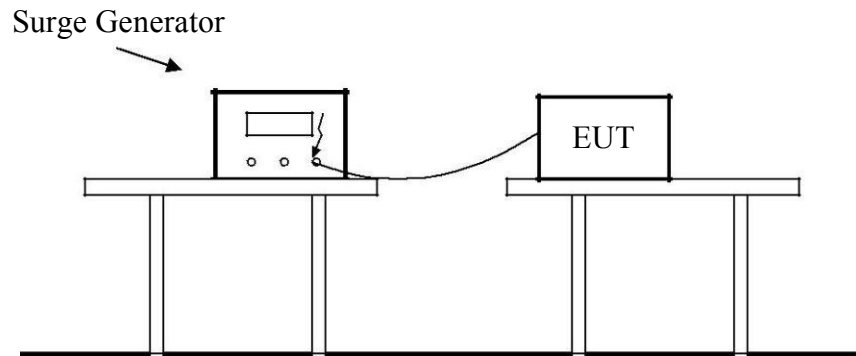

11.2. Test Standard

EN EN 55035:2017+A11: 2020 (EN61000-4-5: 2014+A1: 2017, Severity Level:

Line to Line: Level 2, 1.0KV; Line to Earth: Level 3, 2.0KV)

11.3. Severity Levels and Performance Criterion

11.3.1. Severity level

Severity Level	Open-Circuit Test Voltage (KV)
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

11.3.2. Performance criterion: **B**

11.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.10.

11.5.Operating Condition of EUT

- 11.5.1.Setup the EUT as shown in Section 12.1.
- 11.5.2.Turn on the power of all equipments.
- 11.5.3.Let the EUT work in test mode (ON) and measure it.

11.6.Test Procedure

- 11.6.1.Set up the EUT and test generator as shown on Section 12.1.
- 11.6.2.For line to line coupling mode, provide a0.5KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 11.6.3.At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 11.6.4. Different phase angles are done individually.
- 11.6.5.Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

11.7.Test Results

PASS.

Please refer to the following page.


Electrical Fast Transient/Burst Test Results

Standard	☐ IEC 61000-4-5 ☒ EN 61000-4-5		
Applicant	Hangzhou Metro Technology Co., Ltd.		
EUT	Data Acquisition Unit	Temperature	26℃
M/N	CJQ-01	Humidity	51%
Criterion	B	Pressure	1021mbar
Test Mode	ON	Test Engineer	Liang

Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result
L-N	+	0°	5	1.0	PASS
	+	90°	5	1.0	PASS
	+	180°	5	1.0	PASS
	+	270°	5	1.0	PASS
	-	0°	5	1.0	PASS
	-	90°	5	1.0	PASS
	-	180°	5	1.0	PASS
	-	270°	5	1.0	PASS
L-PE	+	0°	5	2.0	PASS
	+	90°	5	2.0	PASS
	+	180°	5	2.0	PASS
	+	270°	5	2.0	PASS
	-	0°	5	2.0	PASS
	-	90°	5	2.0	PASS
	-	180°	5	2.0	PASS
	-	270°	5	2.0	PASS
N-PE	+	0°	5	2.0	PASS
	+	90°	5	2.0	PASS
	+	180°	5	2.0	PASS
	+	270°	5	2.0	PASS
	-	0°	5	2.0	PASS
	-	90°	5	2.0	PASS
	-	180°	5	2.0	PASS
	-	270°	5	2.0	PASS
Signal Line					

12. INJECTED CURRENTS SUSCEPTIBILITY TEST

12.1. Block Diagram of Test Setup

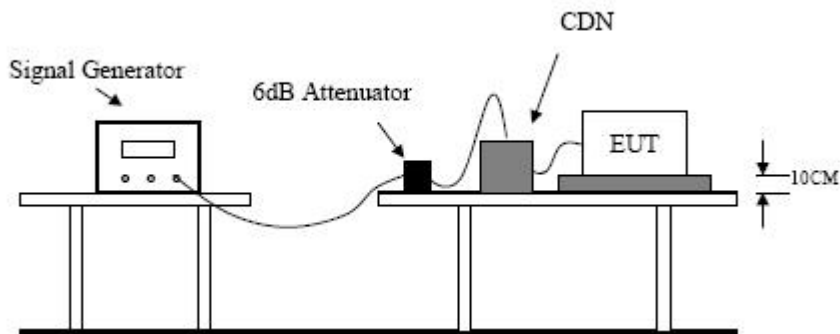

12.2. Test Standard

EN EN 55035:2017+A11: 2020(EN 61000-4-6: 2014, Severity Level: 3V (rms), 0.15MHz ~ 80MHz)

12.3. Severity Levels and Performance Criterion

12.3.1. Severity level

Level	Field Strength (V)
1.	1
2.	3
3.	10
X	Special

12.3.2. Performance criterion: A

12.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.11.

12.5.Operating Condition of EUT

- 12.5.1.Setup the EUT as shown in Section 13.1.
- 12.5.2.Turn on the power of all equipments.
- 12.5.3.Let the EUT work in test mode (ON) and measure it.

12.6.Test Procedure

- 12.6.1.Set up the EUT, CDN and test generators as shown on Section 13.1.
- 12.6.2.Let the EUT work in test mode and measure it.
- 12.6.3.The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 12.6.4.The disturbance signal described below is injected to EUT through CDN.
- 12.6.5.The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 12.6.6.The frequency range is swept from 150kHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.
- 12.6.7.The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 12.6.8.Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

12.7.Test Results

PASS.

Please refer to the following page.

Injected Currents Susceptibility Test Results

Standard	☐ IEC 61000-4-6 ☒ EN 61000-4-6		
Applicant	Hangzhou Metro Technology Co., Ltd.		
EUT	Data Acquisition Unit	Temperature	26℃
M/N	CJQ-01	Humidity	51%
Test Mode	Normal	Criterion	A
Test Engineer	Liang	Test Date	July 3, 2025


Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
0.15 ~ 80	AC Mains	3V	A	PASS

Remark:
Modulation Signal:1kHz 80% AM

Note:

13. MAGNETIC FIELD IMMUNITY TEST

13.1. Block Diagram of Test Setup

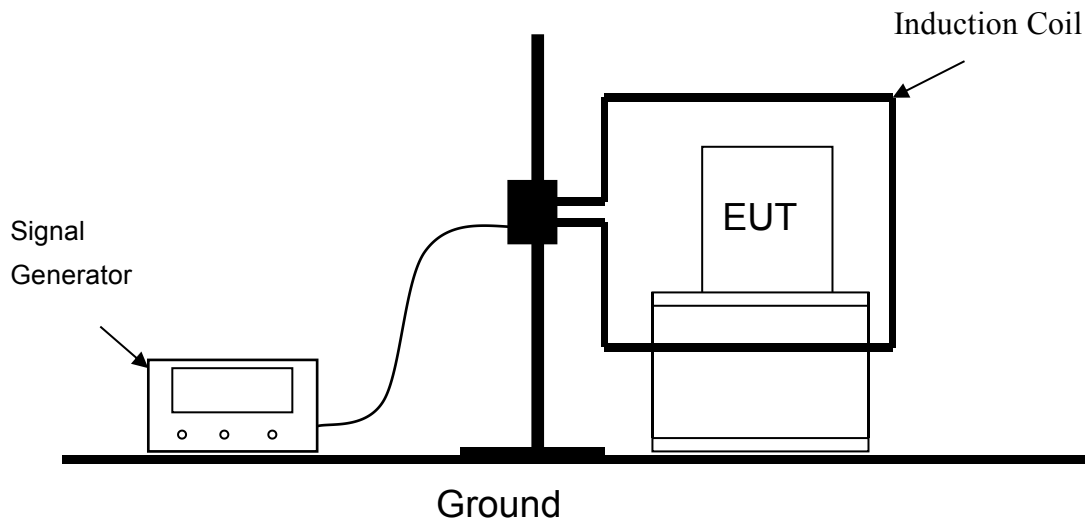

13.2. Test Standard

EN EN 55035:2017+A11: 2020 (EN 61000-4-8: 2010, Severity Level 2: 3A/m)

13.3. Severity Levels and Performance Criterion

13.3.1. Severity level

Level	Magnetic Field Strength (A/m)
1.	1
2.	3
3.	10
4.	30
5.	100
X	Special

13.3.2. Performance criterion: A

13.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.12.

13.5.Operating Condition of EUT

- 13.5.1.Setup the EUT as shown in Section 13.1.
- 13.5.2.Turn on the power of all equipments.
- 13.5.3.Let the EUT work in test mode (On) and measure it.

13.6.Test Procedure

- 13.6.1.Set up the EUT system as shown on Section 13.1.
- 13.6.2.The Induction coil is set up in horizontal or vertical.
- 13.6.3.Let the EUT work in test mode and measure it.

13.7.Test Results

PASS.

Please refer to the following page.

Magnetic Field Immunity Test Result


Standard	☐ IEC 61000-4-8 ☒ EN 61000-4-8		
Applicant	Hangzhou Metro Technology Co., Ltd.		
EUT	Data Acquisition Unit	Temperature	26°C
M/N	CJQ-01	Humidity	51%
Test Mode	Normal	Criterion	A
Test Engineer	Liang	Test Date	July 3, 2025

Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result
3	5 mins	X	A	PASS
3	5 mins	Y	A	PASS
3	5 mins	Z	A	PASS

Note:

14. VOLTAGE DIPS AND INTERRUPTIONS TEST

14.1. Block Diagram of Test Setup

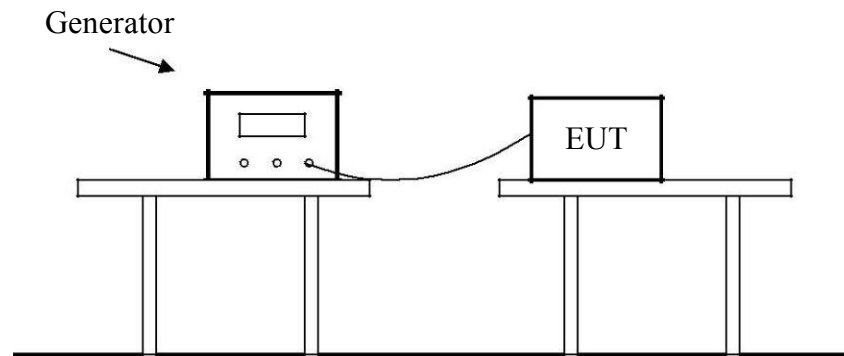

14.2. Test Standard

EN EN 55035:2017+A11: 2020 (EN 61000-4-11: 2020)

14.3. Severity Levels and Performance Criterion

14.3.1. Severity level

Test Level (%U _T)	Voltage dip and short Interruptions (%U _T)	Duration (in period)
0	100	0.5
70	30	10

14.3.2. Performance criterion: **B&C**

14.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.13&3.14.

14.5.Operating Condition of EUT

- 14.5.1.Setup the EUT as shown in Section 15.1.
- 14.5.2.Turn on the power of all equipments.
- 14.5.3.Let the EUT work in test mode (ON) and measure it.

14.6.Test Procedure

- 14.6.1.Set up the EUT and test generator as shown on Section 15.1.
- 14.6.2.The interruptions is introduced at selected phase angles with specified duration.
- 14.6.3.Record any degradation of performance.

14.7.Test Result

PASS.

Please refer to the following page.

Magnetic Field Immunity Test Result


Standard	☐ IEC 61000-4-11 ☒ EN 61000-4-11		
Applicant	Hangzhou Metro Technology Co., Ltd.		
EUT	Data Acquisition Unit	Temperature	26℃
M/N	CJQ-01	Humidity	51%
Test Mode	Normal	Criterion	A
Test Engineer	Liang	Test Date	July 3, 2025

Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Criterion	Result
0	100	0.5P	B	PASS
70	30	10P	C	PASS


Note:

15. PHOTOGRAPH

15.1.Photo of Power Line Conducted Measurement

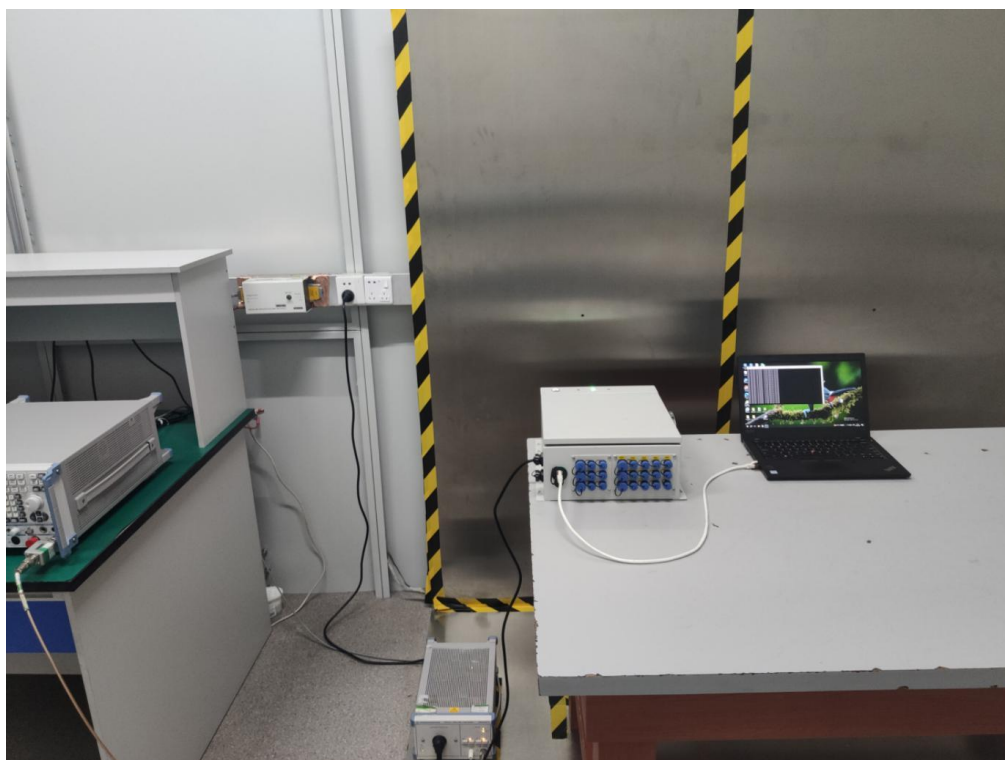

15.2.Photo of Radiated Measurement

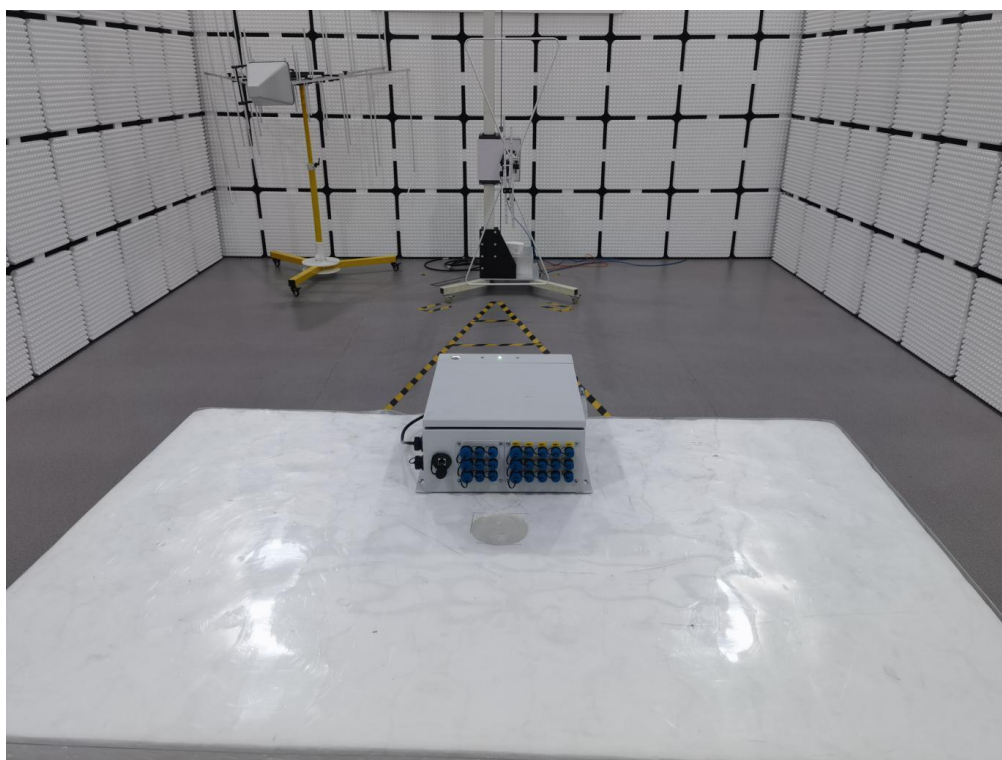

16. EXTERNAL AND INTERNAL PHOTOS OF THE EUT



Fig. 1

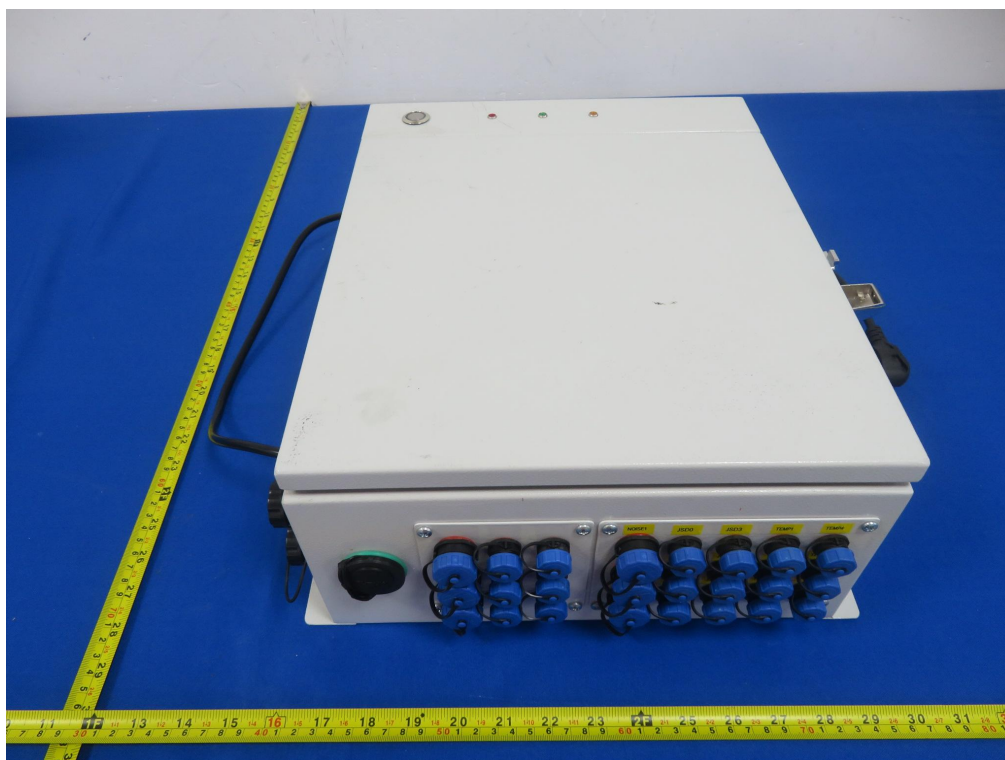


Fig. 2

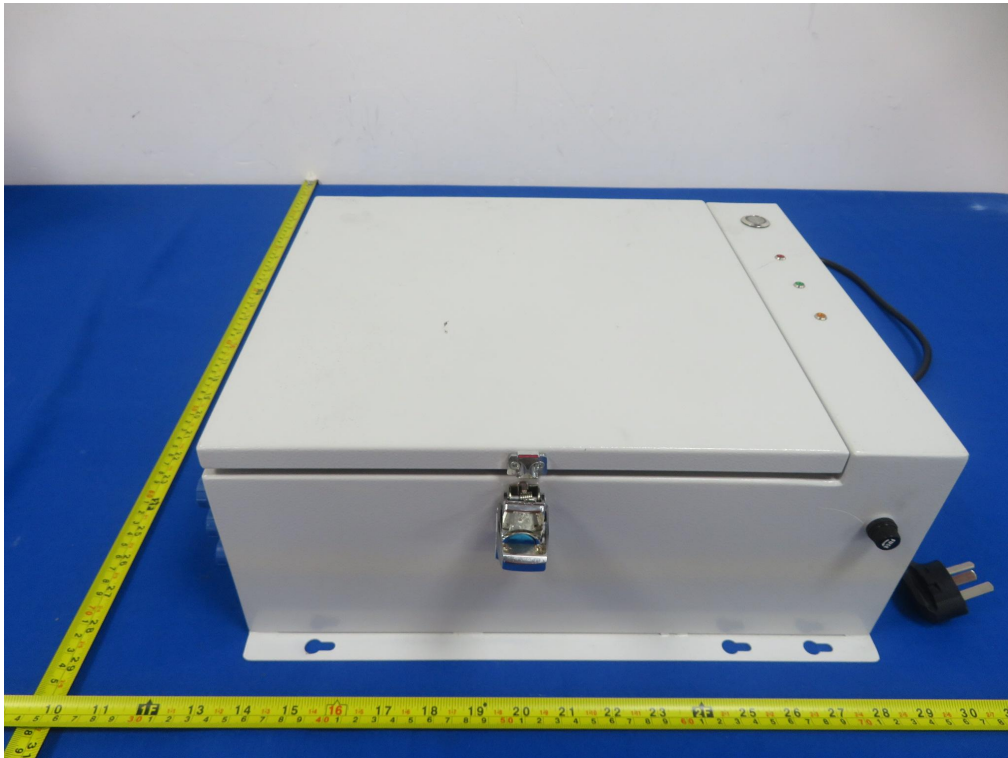


Fig. 3

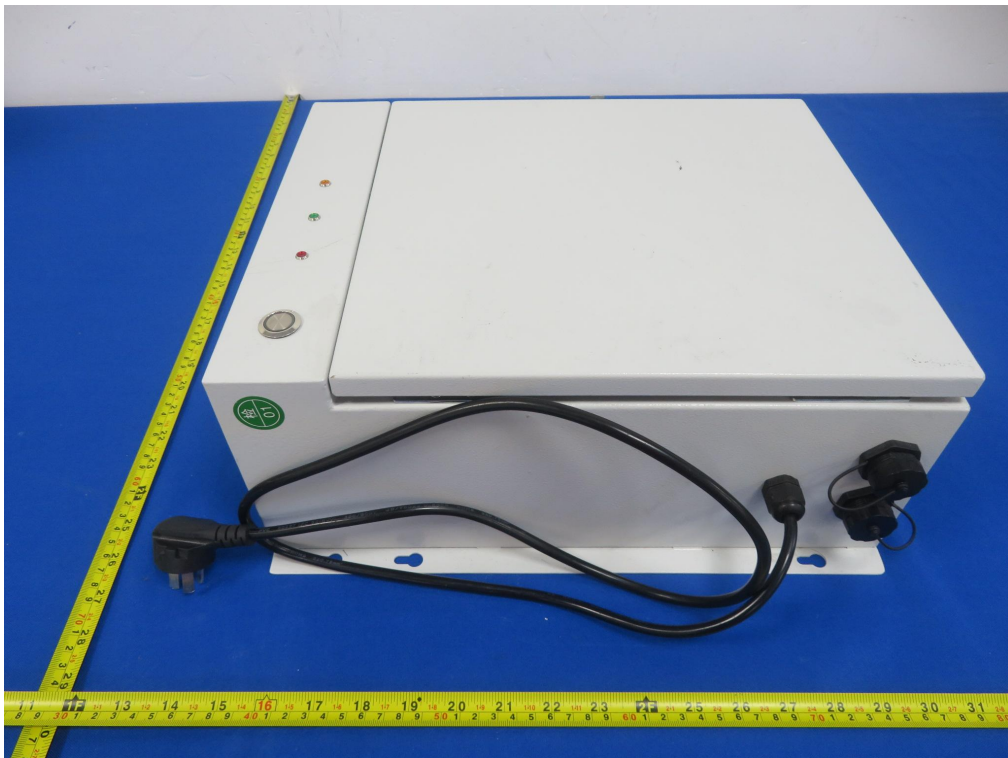


Fig. 4

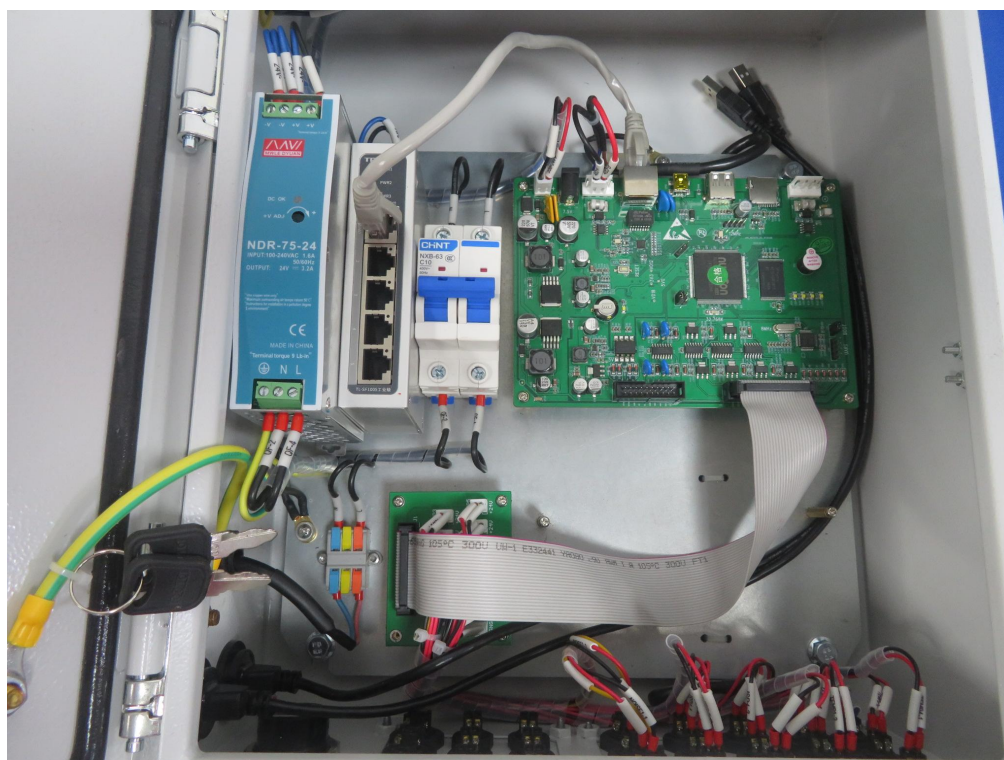


Fig. 5

-----THE END OF REPORT-----